



SPECS & DIMENSIONS

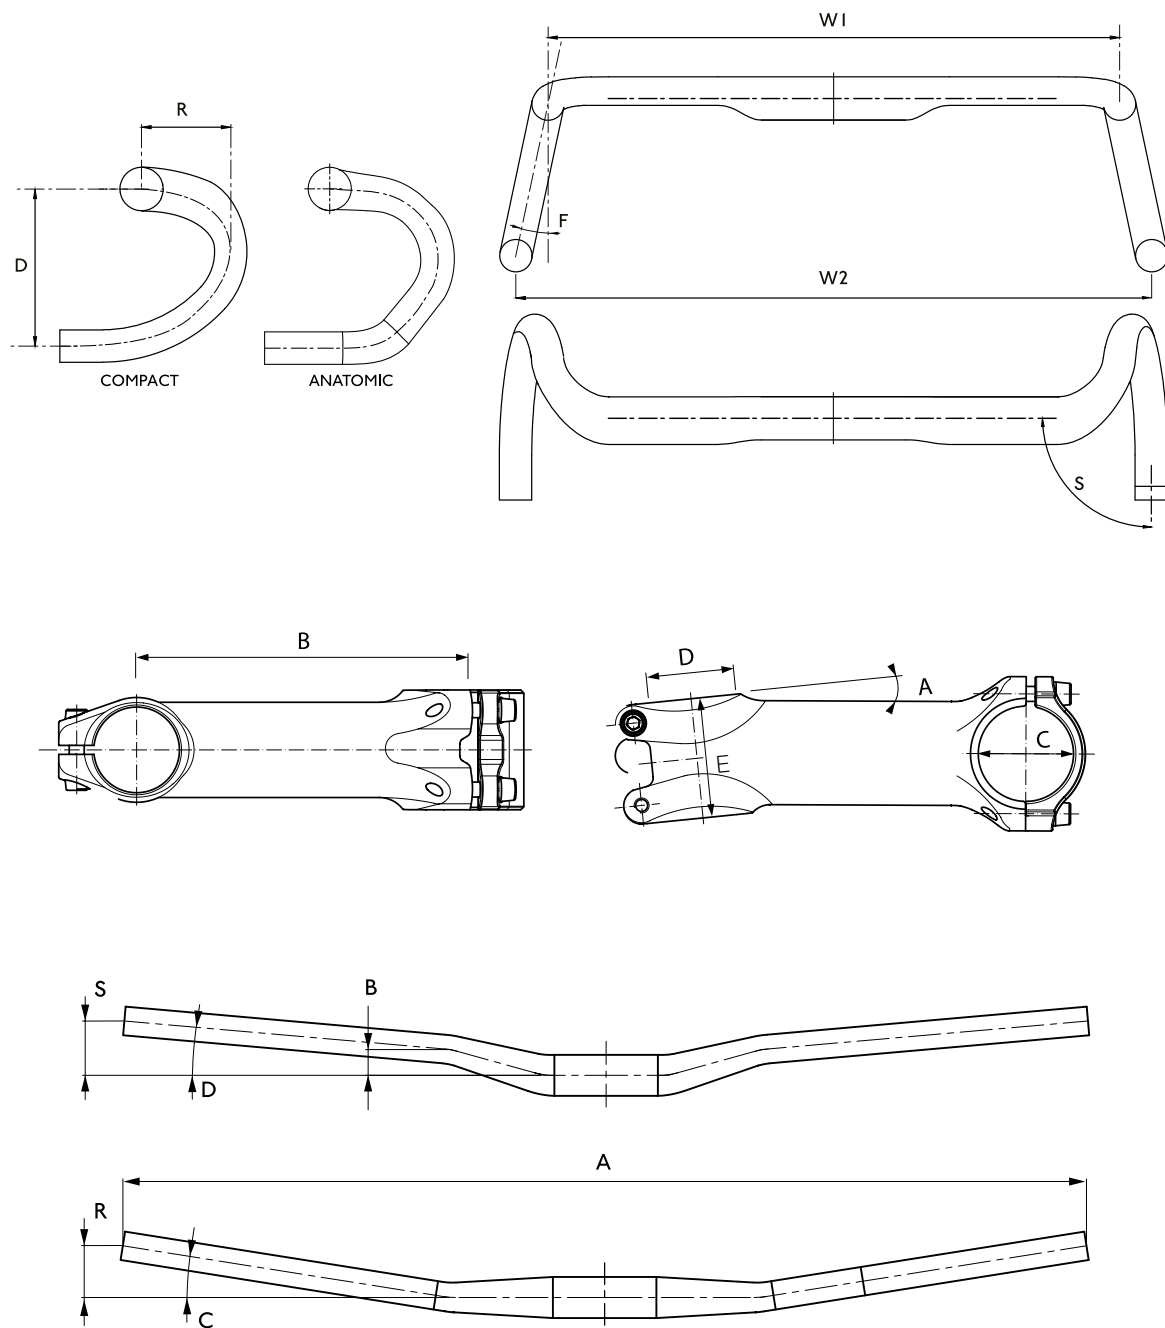

ROAD HANDLEBARS

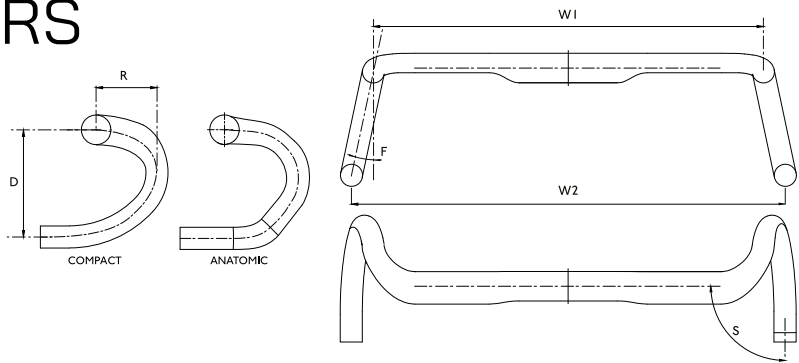


Model	Vibe Superlight	Vibe Carbon	Vibe Aero Carbon
Material	UD T1100 & T800 carbon	UD T800 carbon	T700 & T800 UD Carbon
Top shape	Round	Aero	Aero
Drop shape	Compact	Compact	Compact
Width C-C (W1) (cm)	38 - 40 - 42	36 - 38 - 40	37 - 39 - 41
Drop (D) (mm)	130	130	127
Reach (R) (mm)	80	79	79
Flare (F) (degrees)	0	6	10
Sweep (S) (degrees)	0	0	10 forward / 4 downward
Width drops C-C (W2) (cm)	38 - 40 - 42	38 - 40 - 42	40 - 42 - 44
Cable routing	Full internal	Full internal	Full internal
Diameter (mm)	31,8	31,8	31,8
Weight (from) (grams)	154	215	250
Colour	Black	Black	Black

Model	Vibe Alloy	Vibe Aero Alloy
Material	AL6066	AL6066
Top shape	Round	Aero
Drop shape	Compact	Compact
Width C-C (W1) (cm)	36-38 - 40 - 42	34 - 36-38 - 40
Drop (D) (mm)	130	130
Reach (R) (mm)	80	78
Flare (F) (degrees)	0	6
Sweep (S) (degrees)	0	0
Width drops C-C (W2) (cm)	38 - 40 - 42 - 44	38 - 40 - 42 - 44
Cable routing	Full internal	Full internal
Diameter (mm)	31,8	31,8
Weight (from) (grams)	325	325
Colour	Black	Black


Model	PLT One	PLT Carbon	PLT Alloy	PLT Ergo Carbon			PLT Ergo Alloy		
Material		UD T700 carbon	AL2014	UD T700 carbon			AL2014		
Top shape	Round	Round	Round	Ergo			Ergo		
Drop shape	Compact	Compact	Compact	Compact Ergo			Compact		
Width C-C (W1) (cm)	38 - 40	38 - 40 - 42	36 - 38 - 40 - 42 - 44 - 46	36 - 38	40 - 42	44 - 46	36 - 38	40 - 42	44 - 46
Drop (D) (mm)	120	120	125	120	130	140	115	120	125
Reach (R) (mm)	70	70	70	68	73	78	70	70 - 75	75
Flare (F) (degrees)	6	4	0	4			4		
Sweep (S) (degrees)	0	0	0	0			5 backward / 4 downward		
Width drops C-C (W2) (cm)	43 - 45	42 - 44 - 46	36 - 38 - 40 - 42 - 44 - 46	38 - 40	42 - 44	46 - 48	39 - 42	44 - 46	48 - 50
Cable routing	external	external	external	external			external		
Diameter (mm)	31,8	31,8	31,8	31,8			31,8		
Weight (from) (grams)	350	220 - 225 - 230	255 - 260 - 265 - 270 - 275 - 295	195 - 200	205 - 210	215 - 220	260 - 265	270 - 280	290 - 300
Colour	Black	Black	Black	Black			Black		

VIBE EVO

Model	Vibe Evo
Material	UD T1100 & Innegra
Top shape	Aero
Drop shape	Compact
Width C-C (W1) (cm)	36-38
Drop (D) (mm)	128
Reach (R) (mm)	75
Flare (F) (degrees)	10
Sweep (S) (degrees)	5 forward
Width drops C-C (W2) (cm)	405 - 425
Cable routing	Full internal
Diameter (mm)	n/a
Weight (from) (grams)	290
Colour	Black
Stem length (L) (mm)	80-90-100-110-120-130
Stem angle (degree)	8 (6.1/7.3/8.2/8/8.7/9.4)
Steerer diameter (C)	28.6 (1 1/8")

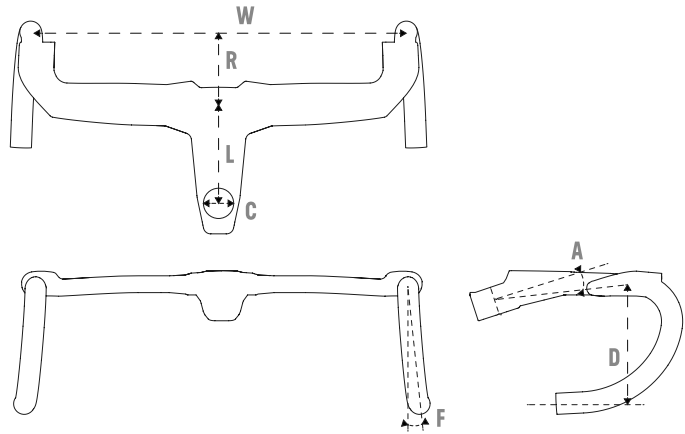


ROAD STEMS




Model	Vibe Aero	Vibe Superlight	Vibe	Vibe Carbon	PLT Integrated	PLT		LT			LT Adjustable
Material	AL7000	Al7075	Al7075	UD carbon	AL6061	AL2014		AL6061			AL6061
Angle (A) (degrees)	-17	± 6	-10	± 8	± 6	± 6	± 17	± 7	± 17	± 35	adjustable +/-40 degrees
Length (B) (mm)	80 - 90 - 100 - 110 - 120 - 130	70 - 80 - 90 - 100 - 110 - 120 - 130	80 - 90 - 100 - 110 - 120 - 130	80 - 90 - 100 - 110 - 120 - 130	80 - 90 - 100 - 110 - 120 - 130	50 - 60 - 70 - 80 - 90 - 100 - 110 - 120 - 130	80 - 90 - 100 - 110 - 120 - 130	50 - 60 - 70 - 80 - 90 - 100 - 110 - 120	60 - 70 - 80 - 90 - 100 - 110 - 120	70 - 80 - 90	90 - 110
Bar diameter (C) (mm)	31,8	31,8	31,8	31,8	31,8	31,8		31,8			31,8
Steerer diameter (D)	11/8"	11/8" - 11/4"	11/8"	11/8"	11/8"	11/8"		11/8"			11/8"
Stack (E) (mm)	32	38	40mm (incl. spacer)	40	TBD			40	40	45	40
Weight (from) (grams)	208	108 (100)	175 (100mm)	120	TBD	target weight from 160gr		TBD			285
Di2 Integration	No	No	No	Yes	No	No		No			No
Colour	Black	Black	Black	Black	Black	Black		Black			Black
Cable routing	Semi internal		Internal		Internal	External		External			External

ROAD SEATPOSTS

Model	Vibe Carbon	Vibe Alloy	PLT	LT
Material	UD carbon (post) AL7075 (plates)	AL2014	AL7050	AL6061
Offset (A) (mm)	0 - 15	0 - 20	0 - 20	0 - 20
Clamp construction	2-bolt (top and bottom plate)	1 bolt side clamp	1 bolt side clamp	1 bolt side clamp
Diameter (mm)	27.2 - 31.6	27.2 - 31.6	27.2 - 31.6	27.2 - 30.9 - 31.6
Length (mm)	350	350	400	400
Weight (from) (grams)	204 (27.2) - 219 (31.6)	230	259 - 257 - 298 - 296	285
Di2 battery	Yes, ready	Yes, compatible	Yes, compatible	Yes, compatible
Colour	Black	Black	Black	Black
Side clamps	Plates are independent from rail dimensions	No	No	No




GRAVEL HANDLEBARS

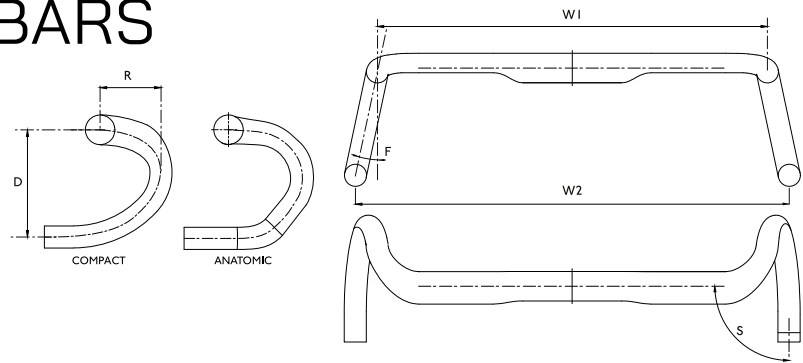

Model	Discover One	Discover Aero	Discover 20 Carbon	Discover 12 Alloy	Discover 20 Alloy	Discover 30 Alloy	Discover Ergo
Material	T700 Carbon	T700 UD carbon & Dyneema	UD carbon	AL6066	AL6066	AL6066	AL7050
Top shape	Aero	Aero	Ergo	Aero	Ergo	Oversized	Ergo
Drop shape	Compact	Compact	Compact	Compact	Compact	Compact	Compact profiled
Width C-C (W1) (cm)	38 - 40 - 42	40 - 42 - 44	40 - 42 - 44	38 - 40 - 42 - 44	40 - 42 - 44	42 - 44 - 46 - 48	40 - 42 -44 -46
Drop (D) (mm)	115	100	105	110	105	90	90
Reach (R) (mm)	70	72	75	70	75	65	67
Flare (F) (degrees)	12	12	20	12	20	30	16
Sweep (S) (degrees)	6 backward	4 forward / 4 downward	5	3 outsweep	5	5	3 backward / 2 downward / 3 outward
Rise (A) (mm)	0	0	0	0	0	0	10
Width drops C-C (W2) (cm)	43 - 45 - 47	44 - 46 - 48	50 - 52 - 54	45 - 47 - 49 - 51	50 - 52 - 54	56 - 58 - 60 - 62	48 - 50 - 52 - 54
Cable routing	External	External	Full internal	External	Semi internal	Semi internal	External (DI2)
Diameter (mm)	n/a	31,8	31,8	31,8	31,8	31,8	31,8
Weight (from) (grams)		265	205	286 - 294 - 302 - 310	270	275	target weight from 285gr
Colour		Black	Black	Black	Black	Black	Black - grey
Stem length (L) (mm)	70-80-90-100-110-120	n/a	n/a	n/a	n/a	n/a	n/a
Stem angle (degree)	-8	n/a	n/a	n/a	n/a	n/a	n/a
Steerer diameter (C)	28,6 (1 1/8")	n/a	n/a	n/a	n/a	n/a	n/a

Model	LT Alloy	LT Ergo Alloy	LT Gravel
Material	AL 6061	AL 6061	AL 6061
Top shape	round	Ergo	Round tapered
Drop shape	Flare	Compact	Compact
Width C-C (W1) (cm)	38 - 40 - 42 - 44	38 - 40 - 42 - 44	40 - 42 - 44 - 46
Drop (D) (mm)	125	125	110
Reach (R) (mm)	70	70	65
Flare (F) (degrees)	4	4	10
Sweep (S) (degrees)	0	0	0
Width drops C-C (W2) (cm)	40 - 42 - 44 - 46	40 - 42 - 44 - 46	44 - 46 - 48 - 50
Cable routing	external	external	external
Diameter (mm)	31,8	31,8	31,8
Weight (from) (grams)	290	295	310
Colour	Black	Black	Black


GRAVEL STEMS




Model	Discover 10	Discover
Material	AL7075	AL7075
Angle (A) (degrees)	± 10	± 6
Length (B) (mm)	60 - 70 - 80 - 90 - 100 - 110 - 120	70 - 80 - 90 - 100 - 110
Bar diameter (C) (mm)	31,8	31.8
Steerer diameter (D)	1 1/8"	1 1/8"
Stack (E) (mm)	33	41
Weight (grams)	142	145
Di2 integration	No	No
Colour	Black	Black
Cable routing	Semi internal	

GRAVEL SEATPOSTS

Model	Discover	Discover 320
Material	UD carbon, Dyneema	UD carbon, Dyneema
Offset (A) (mm)	20	20
Clamp construction	1 bolt side clamp	1 bolt side clamp
Diameter (mm)	27,2	27,2
Length (mm)	400	320
Weight (from) (grams)	205	190
Di2 battery	Yes, ready	Yes, ready
Colour	Black / Dyneema	Black / Dyneema
Side clamps	Carbon rail clamp incl.	Carbon rail clamp incl.



MTB HANDLEBARS

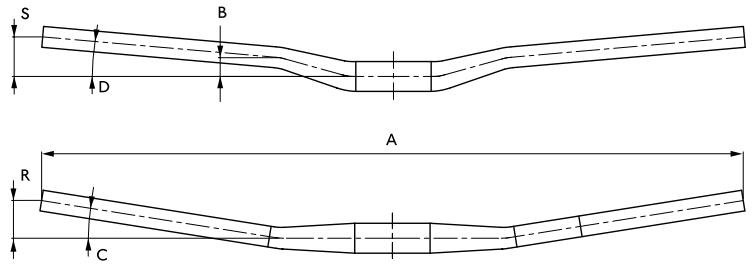


Model	Tharsis 3Five Evo	Tharsis 3Five Riser Carbon	Tharsis 3Five Flat Carbon	Tharsis 3Five Flat Top Carbon	Tharsis 3Five Riser Alloy
Material	UD carbon T800	UD carbon	UD carbon T800	UD carbon T800	Alloy 7050
Width (A) (mm)	780	780	720	740	760 - 780
Rise (A) (mm)	20 - 30	20 - 30 - 40	0	5	10 - 20 - 30 - 40
Backsweep (A) (degrees)	8	8	9	9	8
Upsweep (A) (degrees)	4	4	0	0	4
Stack (A) (mm)	0	0	0	5	0
Reach (A) (mm)	-36	-36	-37	-39	-36
Diameter (A) (mm)	35	35	35	35	35
Weight (A) (grams)	210 - 215	195 - 215 - 215	130	135	280 - 285 - 300 - 305
Di2 integration	Yes	No	No	No	No
Colour	Black	Black	Black	Black	Black

Model	Koryak 3Five Riser 10 Alloy	Koryak 3Five Riser Alloy	Koryak Flat Top	Koryak Riser 10	Koryak Riser 30
Material	AL2014	AL2014	AL2014	AL2014	AL2014
Width (A) (mm)	780	800	760	780	800
Rise (A) (mm)	10	20 - 30 - 40	5	10	30
Backsweep (A) (degrees)	8	8	8	8	8
Upsweep (A) (degrees)	4	4	4	4	4
Stack (A) (mm)					
Reach (A) (mm)					
Diameter (A) (mm)	35	35	31,8	31,8	31,8
Weight (A) (grams)	320	325 - 330 - 335	280	300	310
Di2 integration	No	No	No	No	No
Colour	Black	Black	Black	Black	Black

Model	LT Flat	LT Low Rise 20	LT High Rise 40	LT	LT High Rise
Material	AL6061	AL6061	AL6061	AL2014	AL2014
Width (A) (mm)	720	720	740	800	800
Rise (A) (mm)	0	20	40	20	40
Backsweep (A) (degrees)	9	9	9	9	9
Upsweep (A) (degrees)	0	4	5	5	5
Stack (A) (mm)	0	37	61	44	64
Reach (A) (mm)	-37	-34	-38	-44	-45
Diameter (A) (mm)	31,8	31,8	31,8	31,8	31,8
Weight (A) (grams)	280	330	340	346	346
Di2 integration	No	No	No	No	No
Colour	Black	Black	Black	Black	Black


MTB STEMS

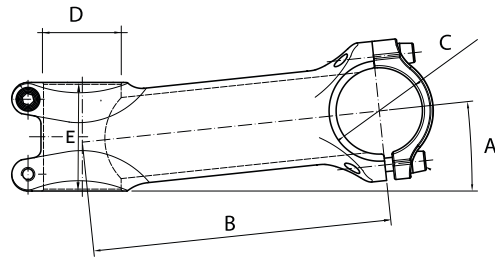


Model	Tharsis	Tharsis Alloy	Tharsis DM	Koryak 3Five	Koryak	LT
Material	AL7050	AL7075	AL7075	AL6061	AL6061	AL6061
Angle (A) (degrees)	0	± 9	0	0	0	0
Length (B) (mm)	35 - 40 - 50	60 - 70 - 80 - 90 - 100	45/50	35 - 40 - 50 - 60	35 - 40 - 50 - 60	40 - 50 - 60
Bar diameter (C) (mm)	35	35	35	35	31,8	31,8
Steerer diameter (D)	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"	1 1/8"
Stack (E) (mm)	40	40	40	40	40	40
Weight (grams)	145 - 155 - 165	150	125	150	150	132
Di2 integration	No	No	No	No	No	No
Colour	Black - Silver	Black	Black	Black	Black	Black
Cable routing	External	External	External	External	External	

MTB SEATPOSTS

Model	Tharsis XC	Koryak
Material	UD carbon	AL7050
Offset (A) (mm)	0	0 - 20
Clamp construction	1 bolt side clamp	1 bolt side clamp
Diameter (mm)	27.2 - 30.9 - 31.6	27.2 - 30.9 - 31.6
Length (mm)	400	400
Weight (from) (grams)	199	246
Di2 battery	Yes, ready	Yes, compatible
Colour	Black	Black
Side clamps	Carbon rail clamp incl	No



PRO DROPPERPOSTS

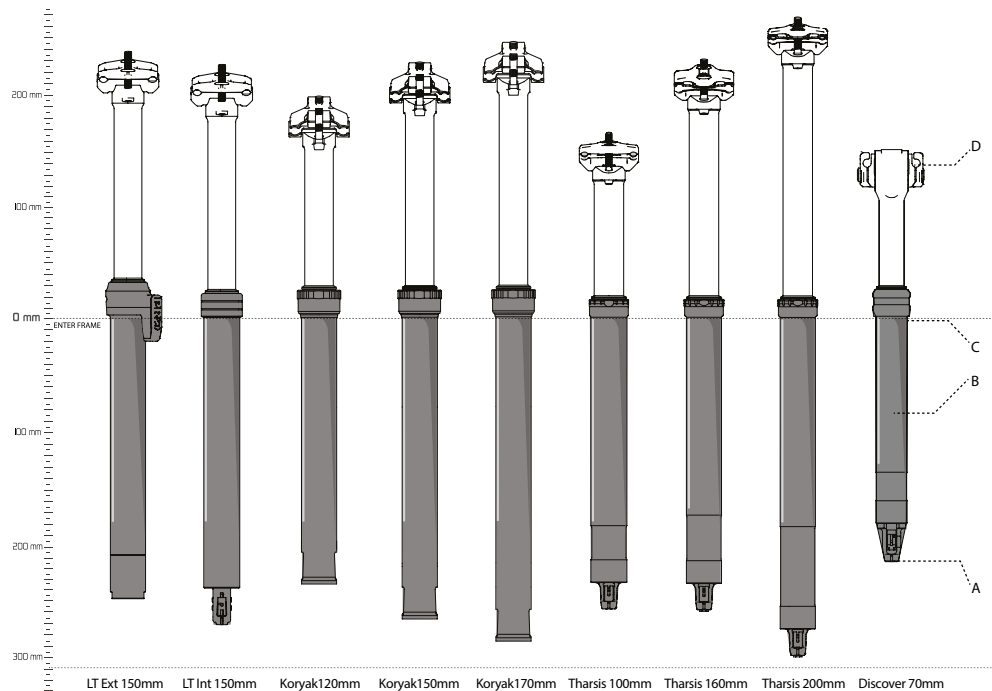

Model	LT 150	LT 150	Koryak 120	Koryak 150	Koryak 170
"Material lower tube: Upper shaft: bolts:"	AL6061 AL6066 Stainless steel	AL6061 AL6066 Stainless steel	AL6061 AL2024 Stainless steel	AL6061 AL2024 Stainless steel	AL6061 AL2024 Stainless steel
Offset (A) (mm)	0	0	0	0	0
Travel (B) (mm)	150	150	120	150	170
Diameter (mm)	30.9 - 31.6	30.9 - 31.6	30.9 - 31.6	30.9 - 31.6 - 34.9	30.9 - 31.6 - 34.9
Cable routing	Internal	External	Internal	Internal	Internal
Weight (A) (grams)	635	660	490 - 510	530 - 550 - 560	580 - 680 - 710
Colour	Black	Black	Black	Black	Black
Lever type	n/a	n/a	n/a	n/a	n/a
Other dimensions (mm)*					
A > D Total lenght	470	459	412	472	512
A > B Minimum insert	120	160	110	110	110
A > C Lower tube length	238	249	236	266	286
C > D Saddle height at max. insertion	205	210	176	206	226
B > D Saddle height at min. insertion	318	299	302	362	402

*Find the best fitting dropper seatpost by using the online PRO DSP selector tool

Model	Tharsis 100	Tharsis 160	Tharsis 200	Discover
"Material lower tube: Upper shaft: bolts:"	AL6061 AL7050 Titanium	AL6066 AL7050 Titanium	AL7075 AL7050 Titanium	AL6061 AL6061 Stainless steel
Offset (A) (mm)	0	0	0	0
Travel (B) (mm)	100	160	200	70
Diameter (mm)	27.2	30.9 - 31.6 - 34.9	30.9 - 31.6 - 34.9	27.2
Cable routing	Internal	Internal	Internal	Internal
Weight (A) (grams)	417	485	545	417
Colour	Black	Black	Black	Black
Lever type	n/a	n/a	n/a	Drop bar type
Other dimensions (mm)*				
A > D Total lenght	400	465	545	350
A > B Minimum insert	113	110	150	120
A > C Lower tube length	257	235	275	249
C > D Saddle height at max. insertion	143	206	246	134.5
B > D Saddle height at min. insertion	287	331	371	236.5

*Find the best fitting dropper seatpost by using the online PRO DSP selector tool

